



* Technical data and characteristics subject to modifications without notice

Pumping unit technical data

		PA709F8
Max. theoretical output	m ³ /h	70
Max. pressure on concrete	bar	85
Conc. cylinders (diam. x stroke)	mm	200 x 1500
Concrete hopper capacity	l	550


Total weight less than 18 tons, payload to the user always available.

Super compact machine mounted on 4x2 4100* wheelbase trucks for excellent maneuverability.

Contained stabilisation dimensions for easy placement in all types of job sites.

Control System with pumping unit PA709F8

Integrated color LCD	Diagnostics
Counters	Capsense rear panel
Pumping unit management	

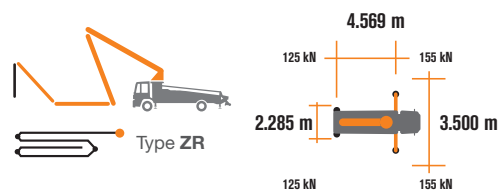

Placing boom technical data

		B4ZR 20/16
Pipeline diameter	mm	125
Max. vertical reach	m	19.75
Max. horizontal distance	m	16,1
Min. unfolding height	m	3.95
Sections number		4
1st section opening angle		90°+8°
2nd section opening angle		180°
3rd section opening angle		253°
4th section opening angle		253°
Rotating angle		+/-270°
End hose lenght	m	3

Optional



Lsc Safe boom operation is guaranteed when two, three or four outriggers are fully opened.



MBE
Maximum boom
extension control



Automatic
RPM
Management



STEELTECH Series K20L

Standard Equipment


Front single telescopic horizontal outriggers for a quick set-up and easy pump placement in narrow areas
 Driven by PTO or gear box
 Boom control by means of "Load Sensing" proportional distributor
 Safety device upon opening of concrete discharge door and hopper grille
 Emergency device for pumping group
 2 Hetronic proportional radio controls with 3 manipulators
 Emergency radio control cable 20 m
 Plastic water tank with 600-litre capacity
 Medium pressure water pump (50 l/min - 50 bar)
 LED lights for stabilisation and hopper lighting
 Double layer piping with chromium carbide inserts on the entire piping line
 Washing accessories
 High resistance of the components most subject to wear ("S" valve, wear plate, compensating ring)
 Declaration of conformity supplied with the user and maintenance manual

Main Options

Easytronic Gold (Easytronic Silver + LSC Light Stability Control)
 Automatic boom opening and closing
 Centralized boom lubrication system
 Concrete shut-off valve
 High pressure water pump (150 bar - 15 l/min)
 Radio remote control: Hetronic or HBC equipped with display
 Straight concrete piping on double layer boom with high wear-resistance chromium carbide inserts CIFA LLT Long Life Top
 Wide choice of customer personalization colours

***Over 100 options available; details available on truck pumps optional booklet**

Distribution boom B4ZR 20/16

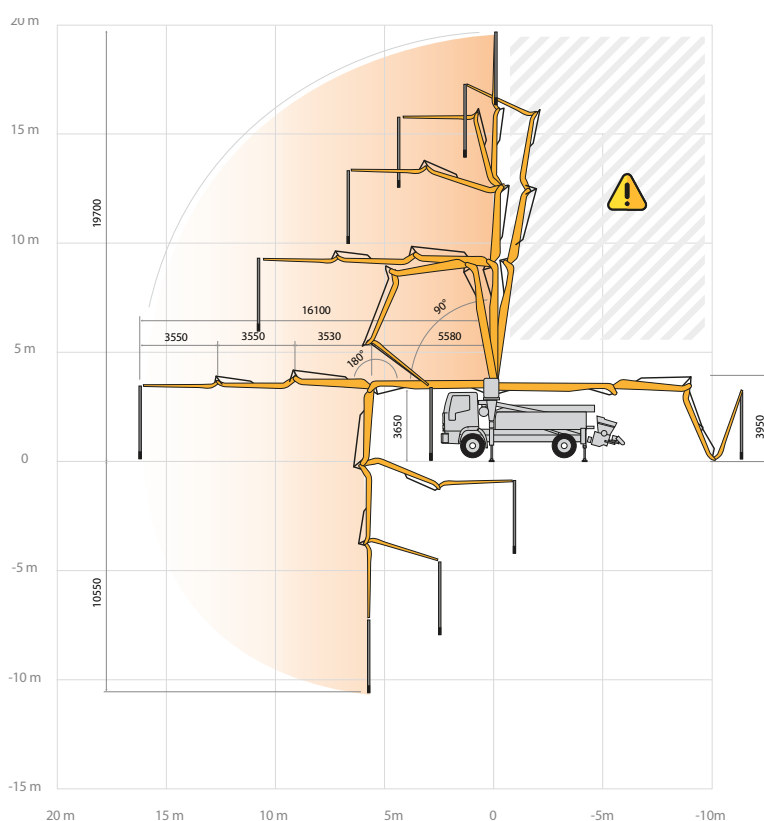

Product Video

