Čelisťové drtiče DC
DC Jaw Crushers

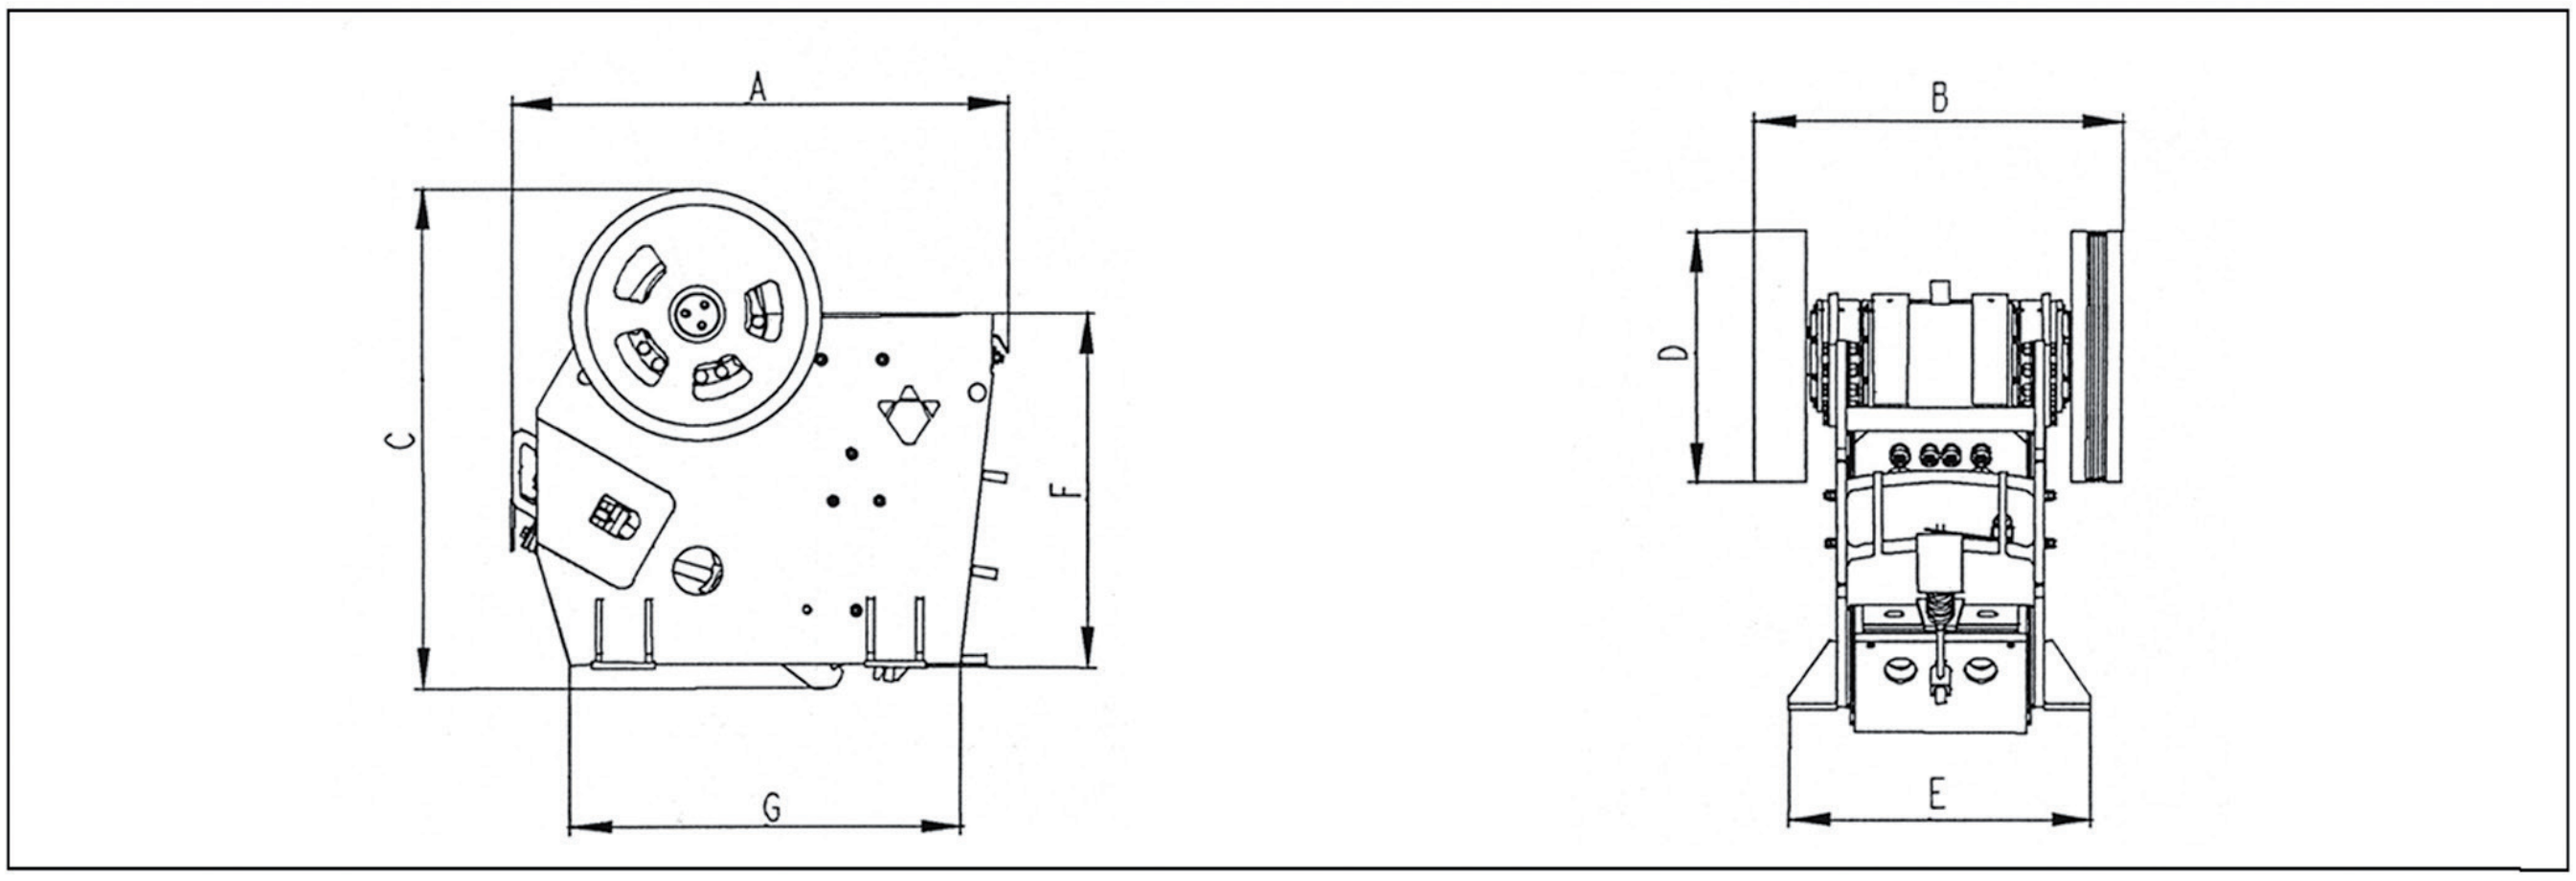

Typové označení Model name	DC 75 x 50	DC 85 x 50	DC 90 x 60	DC 95 x 70	DC 105 x 80	DC 115 x 85	DC 130 x 105
A	1960	1826	2193	2560	3100	3160	3720
B	1500	1598	1694	1925	2105	2350	2650
C	1665	1773	2064	2430	2590	3190	3850
D	970	970	1100	1285	1470	1600	2000
E	1140	1300	1350	1535	1800	1930	2200
F	1195	1072	1331	1730	1855	2260	2600
G	1540	1630	1816	2020	2250	2500	3100

Typové označení Model name		DC 75 x 50	DC 85 x 50	DC 90 x 60	DC 95 x 70	DC 105 x 80	DC 115 x 85	DC 130 x 105
Délka vstupního otvoru Feed opening Lenght	mm	750	850	900	950	1 050	1 150	1 300
Šířka vstupního otvoru Feed opening Width	mm	500	500	600	700	800	850	1 050
Rozsah nastavení štěrbiny CSS Range	mm	20÷80	40÷85	40÷170	50÷165	70÷180	80÷250	120÷260
Výkon Capacity	m^3/ h	15,5÷58	30÷70	35÷150	50÷200	80÷250	100÷400	150÷450
Příkon Power Installed	kW	45	75	90	90÷110	90÷110	90÷132	132÷160
Otáčky setrvačníku Fly-Wheel r. p. m.	1/min	295	295	280	270	260	250	220
Hmotnost bez pohonu Weight except Drive	kg	7 100	8 100	11 150	13 800	21 000	29 000	45 000

Čelisťové drtiče DC

Čelisťové drtiče jednovzpěrné jsou určeny k primárnímu drcení nelepivých středně tvrdých a tvrdých materiálů jako je žula, čedič, vápenec, rula, droba apod. Při návrhu čelisťových drtičů byly respektovány požadavky na nízké náklady na údržbu a její jednoduchost, vysokou spolehlivost a nízké provozní náklady. Příkladem tohoto přístupu je jednoduché nastavování výstupní štěrbiny a standardní vybavení drtičů automatickým mazáním. Čelisťové drtiče DC představují vynikající volbu pro provozy, které vyžadují vysokou účinnost, spolehlivost a dlouhou životnost v náročných provozních podmínkách.

DC Jaw Crushers

Single toggle jaw crushers are preferably used at primary crushing of non-sticky medium hard and/or hard rocks like granite, basalt, limestone, gneiss, greywacke, etc. The jaw crusher design has been focused to decreasing maintenance costs and demands, and to increasing their reliability and cutting operation costs. Simplifying of setting and a standard application of an automatic grease lubrication as a standard part of delivery could be an example of this approach. DC jaw crushers are an excellent choice for facilities that require high efficiency, reliability and durability in demanding operating conditions.

DSP Přerov, spol. s r.o.
Kojetínská 2900/51, 750 02 Přerov I - Město, Czech Republic
tel/fax: +420 581 209 050, +420 581 209 051
E-mail: dsp@dspprerov.cz, http://www.dspprerov.cz