



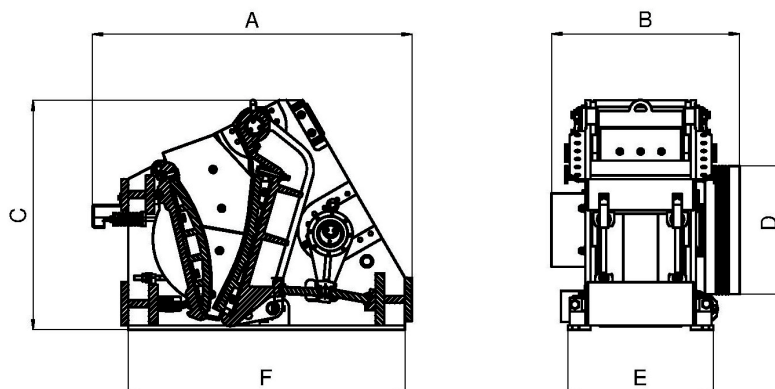

Čelistové drtiče DT Jaw Crushers DT

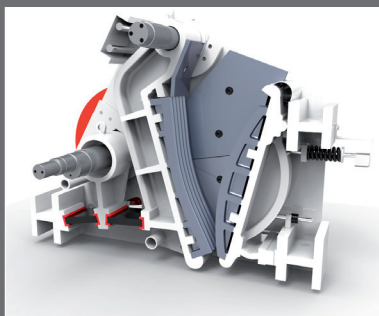

Typové označení Model Name	DT 50 x 40	DT 54 x 40 R
A	1830	1830
B	1090	1090
C	1325	1325
D	Ø 740	Ø 740
E	840	840
F	1600	1600

Typové označení Model Name		DT 50 x 40	DT 54 x 40 R
Délka vstupního otvoru Feed opening Length	mm	500	540
Šířka vstupního otvoru Feed opening Width	mm	400	400
Rozsah nastavení šterbiny CSS Range	mm	30 - 80	10 - 60
Výkon Capacity	m ³ / h.	14 - 33	5 - 28
Příkon Power Installed	kW	30	30
Otáčky setrvačniku Fly-Wheel r. p. m.	1/min	375	375
Hmotnost bez pohonu Weight except Drive	kg	3 640	3 640

Čelistové drtiče DT

Dvouzpěrné čelistové drtiče řady DT jsou určeny pro primární drcení tvrdých až extrémně tvrdých materiálů, jako jsou přírodní horniny, rudy nebo hutní odpady. Uplatnění nacházejí rovněž v ocelářském průmyslu, kde je kladen důraz na robustnost, spolehlivost a jednoduchou údržbu. Konstrukce drtičů DT vychází z osvědčeného technického řešení, které je prověřeno desítkami let provozu v těžkých podmínkách. Důraz je kladen na efektivní provoz, snadnou obsluhu a dlouhou životnost.

Na základě vývoje byly vyvinuty také varianty s označením „R“, které jsou optimalizovány pro recyklaci stavebních materiálů. Tyto modely jsou vhodné pro drcení betonu, železobetonu, cihel, asfaltových vrstev a dalších druhů demoličního odpadu.

Jaw Crushers DT

The double-toggle jaw crushers of the DT series are designed for primary crushing of hard to extremely hard materials, such as natural stones, ores, or metallurgical waste. They are also used in the steel industry, where robustness, reliability, and easy maintenance are essential. The design of DT crushers is based on a proven technical concept, verified by decades of operation in demanding conditions. Emphasis is placed on efficient performance, user-friendly operation, and long service life.

As a result of continuous development, variants marked “R” have been introduced, optimized for recycling construction materials. These models are suitable for crushing concrete, reinforced concrete, bricks, asphalt layers, and other types of demolition waste.

DSP Přerov, spol. s r.o.

Kojetínská 2900/51, 750 02 Přerov I - Město, Czech Republic

tel/fax: +420 581 209 050, +420 581 209 051

E-mail: dsp@dspprerov.cz, <http://www.dspprerov.cz>